



Timber Engineering Machinery

POSI-JOIST PRESS

MiTek Strut-Runner

Posi-Joist Press



- Hydraulic system delivers 18 tonnes of force at high pressure with a lower alternate setting of your choice for faster operation
- The electronic "teach" system programs the press to automatically repeat the pressing sequence
- 630mm wide, 15m long and 830mm high pressing platform


Shaping the future

MiTek Strut-Runner

Posi-Joist Press

Technical Data

Table	630mm wide, 15m long and 830mm high
Platten Size	760 x 430mm
Pressure and Capacity	150 bar and 15 tonne with 7500W 3 phase motor, 40 amp supply
Clamping	32 No Pneumatic cylinder with Quick Release. 3 sizes of stop with quick change between sizes. 10 CFM air supply required
Height Adjustment	Motorised lead screw with 2 Button operation and LED display
Web Location	Centre Unistrut channel with locator
Automation	Siemens PLC with teach facility. Ability to program left and right. Speed will be 0.8 - 4.0m/sec
Safety	CE Marked. Plexiglass guard with secondary optical guard to activate 'E' Stop circuit

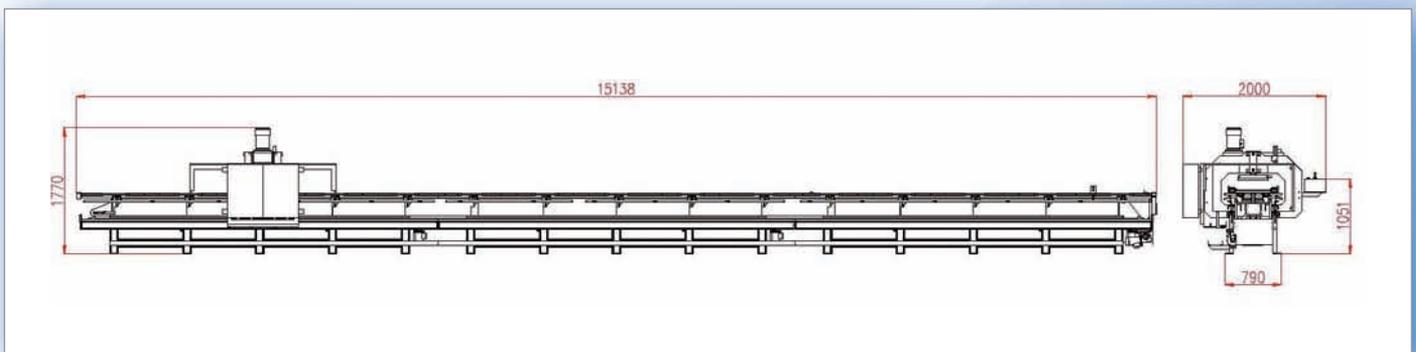

MiTek Industries Ltd
Grazebrook Ind Est, Peartree Lane
Dudley, West Midlands DY2 0XW

Tel (+44) 1384 451400
Fax (+44) 1384 451411

Contact:
Mr Roy Troman - Sales & Marketing Director
Mr Peter Bullock - Special Products Manager

Website: www.mitek.co.uk